
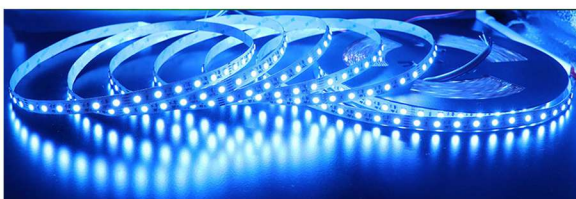
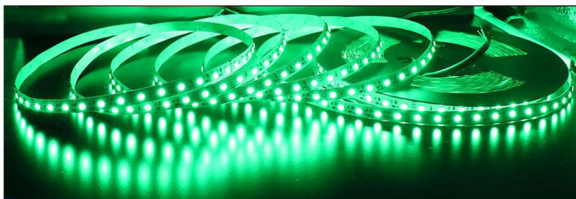
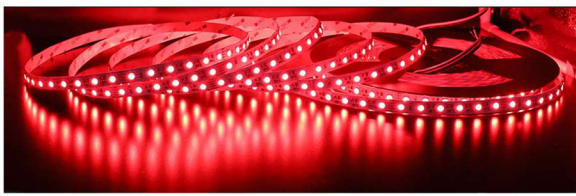


FUTURA LIGHTING

Futura ETL Approved RGBWW 24VDC Low Voltage LED Flexible Ribbon Special

Product Name: ETL-RBL-RGBWW-S (Indoor) and ETL-STRIP-RGBWW-S (Outdoor)

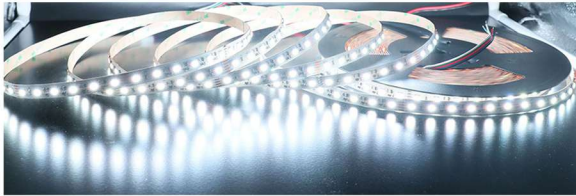

Features:

LED Strip Type:	5050SMD Constant Current RGBW LED Strip
LED Chip:	Epistar Chip
Working Temperature:	-4°F (-20°C) ~ 122°F (50°C)
Storage Temperature:	-40°F (-40°C) ~ 176°F (80°C)
Light Color:	RGB+WW3000K (4 in 1 Chip)
Cutting:	Every 4"
LED Quantity:	60 LEDs per 1meter (3.28 ft)
Lifespan:	50,000+hours
Dimensions:	W 1.2cm(0.47 in) x H 0.30cm(0.12 in)
Input Voltage(V):	24 VDC
Working Power:	3.5W/ft
Lamp Luminous Flux(Lm):	170Lm/ft
Wavelength NM(RGBY):	Red(620-630nm), Green(515-525nm), Blue(465-475nm), Yellow(585-595nm)
Approval:	ETL
Length:	Max 15 Meters (49.2') Power feed from one end
Beam Pattern:	120 degree
IP Rating:	IP20 (non Waterproof) and IP68 (Waterproof)

Reference Numbers:

Model No.	Length
ETL-RBL-RGBWW-S	(16.25' - 5 Meters)
ETL-RBL-RGBWW-S-15	(49.2' - 15 Meters)
ETL-RBL-RGBWW-S-FT	(by Foot)
ETL-STRIP-RGBWW-S	(16.25' - 5 Meters)
ETL-STRIP-RGBWW-S-15	(49.2' - 15 Meters)
ETL-STRIP-RGBWW-S-FT	(by Foot)



Compatible LED Drivers:

FL-2406T Waterproof	60W, Input 100-240V 50/60Hz, Output 24VDC, IP67
FL-2410W Waterproof	100W, Input 100-240V 50/60Hz, Output 24VDC, IP67
FL-2420W Waterproof	200W, Input 100-240V 50/60Hz, Output 24VDC, IP67