


Electronic Transformers

150 WATT RS "KO" SERIES ELECTRONIC TRANSFORMERS

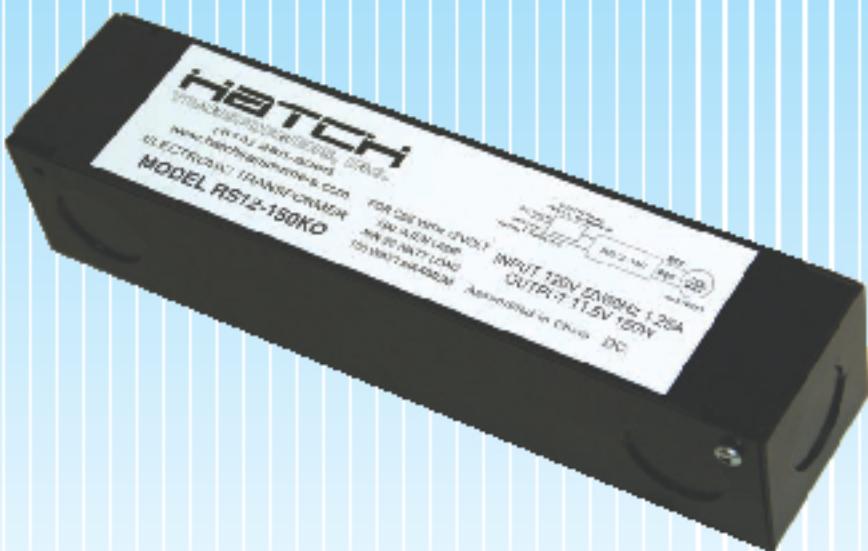

RS12-150 KO

Electrical/Mechanical Specifications

Soft Start Circuitry

All models of Hatch low-voltage transformers utilize a soft start circuitry to maximize lamp life. The soft start circuit ramps up the lamp filament voltage slowly when the lamp is cold.

Note: Instant Start on Hot Lamp Re-Strike

Electronic Short-Circuit Protection

All Hatch low-voltage transformers employ our (ESP) Electronic Short Circuit and over load Protection. The ESP sensing circuit will instantly shut down the output before any of the components are stressed if a short circuit or over load is detected. The transformer will automatically reset as soon as the fault is corrected.

150 Watt RS-KO Series

Electronic Low Voltage Transformer Product Features:

- High Reliability
- Moisture Resistant
- Emits No Audible Noise
- Low Harmonic Distortion
- High Power Factor
- Lightweight, Compact Design
- Small Case Size
- Works with most commercially available dimmers. Hardwire electronic dimmers are recommended for optimum performance.

(See notes on back page.)

Environmental Specifications

Maximum Case Temperature	80°C
Minimum Starting Temperature	-30°C
Sound Rating	A+
Operating Humidity	95% relative humidity, non-condensing
Environmental Protection	Epoxy Sealed for moisture resistance and shock/vibration resistance
Safety Listing	Class P Type 1 outdoor

Electrical/Mechanical Specifications

Input	120VAC - 50/60 Hz
Output	11.5 VAC or 23.5 VAC
Enclosure Material	Metal
Weight	16 oz.
Power Factor	> 0.95
Operating Frequency	25 KHz
Total Harmonic Distortion	≤ 20%
Safety Standard	UL 1548
Input	2 input connector, accepting 14-22 AWG wire types
Output	3 output connector, accepting 14-22 AWG wire types


Note: 1 connector for ground

HATCH

Electronic Transformer

150 Watt RS-KO Series


DIMENSIONS

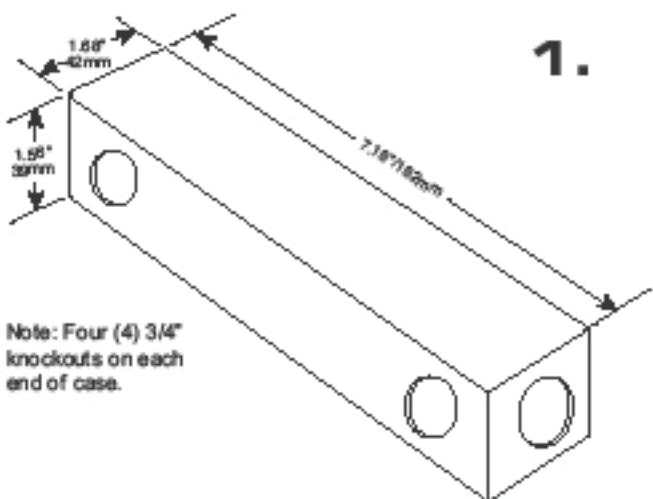

Note: Four (4) 3/4" knockouts on each end of case.

WIRING DIAGRAMS

DIAGRAM A

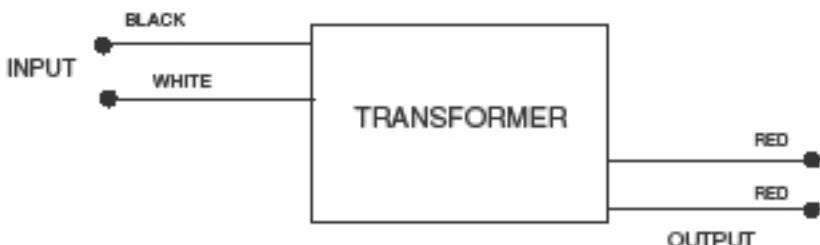

HARDWIRE ELECTRONIC

Max Watts	Min Watts	Input Volts	Input Amps	Output Volts	Output Amps	Case Style	Wiring Dia.	Hatch Item No.	Safety Listing
150	10	120	1.25	11.5	13.05	1	A	RS12-150KO	UL/C-UL Listed
				23.5	6.39	1	A	RS24-150KO	

*Note: Must use a minimum of 20 watts when using dimmers. It is also important to confirm dimming controls compatibility with the manufacturer and your Hatch representative.

Specifications subject to change without notice. 0909

HATCH