


FUTURA LIGHTING

Futura LED GU10 10W Dimmable Bulb | 90-265VAC

Prod. Names: L10GU10-45WW (Warm White), L10GU10-45W (Cool White)*Special Order

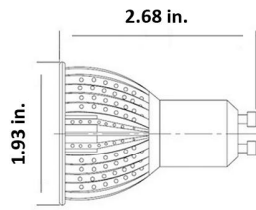

Technical Specifications:

Rating Power (w): 10W
Rated Voltage (V): 90~265V AC
Rated Current (mA): 900 mA
LED: Latest Generation (MTG-2) CREE Multi-chip High-powered LED
Luminous Flux: 500lm (Warm White), 580lm (Cool White)*Special Order
Color Temperatures: 3000K (Warm White), 5000K (Cool White)*Special Order
Beam angle: 45 Degrees
Color rendering Index: Ra>80
Dimmable w/ Lutron Dimmers: DIVA C-L: Model DVCL-153P
 MAESTRO C-L: Model MACL-153MH
LED for replacement of existing lamp: 50W Halogen GU10 Spotlights

Ref. Name & Colors:


Ref. Name: L10GU10-45 (90-265VAC)

Model	Watts	CCT	Luminous Flux	Beam Angle
L10GU10-45WW	10W	3000K	500lm	45°
L10GU10-45W*	10W	5000K	580lm	45°

*Special Order

Futura LED PAR30 35W Bulb | 85-265VAC

Prod. Names: FL-PAR30-35W

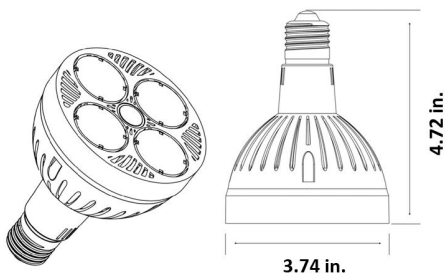

Features:

35W LED PAR30: Directly Replaces 75W Halogen PAR30, Saving at Least 50% of Energy
Manufacturer: Original OSRAM LED with Credible Performance
Life-span: 50,000 Hours on Average
Base Type: E36/27 Base
Degree and lense: 25 Degrees with Transparent Lens or 40 Degrees with Transparent Lens
Color Rendering Index (CRI): 80-85
Dimensions: Diameter 3.74" | Length 4.72"

Precautions:

1. Do not use in sealed fixture
2. Power off before replacement
3. Do not touch the lamp when lighting
4. Only for indoor use

Ref. Name & Colors:

Ref. Name: FL-PAR30-35W (85-265VAC)

Model	Watts	CCT	Luminous Flux	Beam Angle
FL-PAR30-35W-25CW	35W	2900-3100K	1800-2000lm	25°
FL-PAR30-35W-25NW	35W	3700-3900K	1900-2000lm	25°
FL-PAR30-35W-25WW	35W	6000-6300K	2500-2600lm	25°
FL-PAR30-35W-40CW	35W	2900-3100K	1800-2000lm	40°
FL-PAR30-35W-40NW	35W	3700-3900K	1900-2000lm	40°
FL-PAR30-35W-40WW	35W	6000-6300K	2500-2600lm	40°