

FUTURA LIGHTING

Futura 3 Adjustable Colors LED Undercabinet Light, 3000K, 4000K, & 6000K, 3 Watts

Model Number: FL-120A



SURFACE MOUNTED



RECESSED MOUNTED



FL-120A-01S



FL-120A-02S




FL-120A-04S




FL-120A-05S

DIMENSIONS:

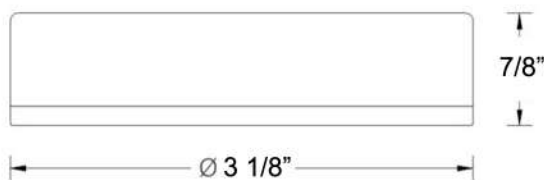

SURFACE MOUNTING

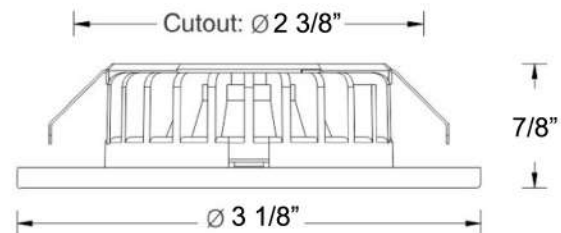

RECESSED MOUNTING

PART NUMBERS:

- FL-120A-01S:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Surface LED Undercabinet Light, 3 Watts, Black Finish
- FL-120A-02S:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Surface LED Undercabinet Light, 3 Watts, White Finish
- FL-120A-04S:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Surface LED Undercabinet Light, 3 Watts, Chrome Finish
- FL-120A-05S:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Surface LED Undercabinet Light, 3 Watts, B. Chrome Finish
- FL-120A-01R:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Recessed LED Undercabinet Light, 3 Watts, Black Finish
- FL-120A-02R:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Recessed LED Undercabinet Light, 3 Watts, White Finish
- FL-120A-04R:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Recessed LED Undercabinet Light, 3 Watts, Chrome Finish
- FL-120A-05R:** 3 Adjustable Colors, 3000K, 4000K, & 6000K, Recessed LED Undercabinet Light, 3 Watts, B. Chrome Finish

FUTURA LIGHTING

FEATURES:

3 Adjustable Colors

Warm White, 3000K, 210 Lumens

Neutral White, 4000K, 225 Lumens

Cool White, 6000K, 240 Lumens

Dimmable with low voltage dimmer

Long Lifetime: >50,000 hours

Magnetic Trim Ring

No RF interference, no Mercury, nor Lead

Lumen maintenance: 70% at 30,000 hours

Surface mounted with screws

3 watts Recessed or surface

AMP Connector

3 ft long wire

Ceiling Cutout 2 3/8" (60mm)

This item can be used with an additional 3Ft. Extension Cord (1201 91) and 6 Lights Distribution Box (1201 90)

UL Approved



Switch for
3 Adjustable Colors

STRONG ADVANTAGES:

With built-in constant voltage LED driver, powered by 12VDC

Adopt 3W high lumen Epistar LED to guarantee the high brightness and low working temperature

ACCESSORIES:

This **Non-dimmable** LED Driver (FL-36-LED-6B) can be used with LED Puck Light listed above:



FL-36W-LED-6B

Driver Specifications:

Input Voltage: 100-240V

Output Voltage: 12V

Output Max. Power: 36W

Comes with 6-light Distribution Box

Plug-in wire 5'

Distribution Box wire 3'



1201-90 SIX LIGHT
DISTRIBUTION BOX



EXTENSION CORDS
EXT-01, EXT-02, & EXT-03

Want to make the puck light dimmable? Choose from one of our electronic dimmable drivers below:

LED-12W-12V-DIM (Dimmable Electronic Constant Voltage Driver | Input 120VAC, Output 12W 12VDC)

LED-12W-12V-DIM-220 (Dimmable Electronic Constant Voltage Driver | Input 220VAC, Output 12W 12VDC)

LED-26W-12V-DIM (Dimmable Electronic Constant Voltage Driver | Input 120VAC, Output 26W 12VDC)

LED-26W-12V-DIM-220 (Dimmable Electronic Constant Voltage Driver | Input 220VAC, Output 26W 12VDC)

LED-48W-12V-DIM (Dimmable Electronic Constant Voltage Driver | Input 120VAC, Output 48W 12VDC)

LED-48W-12V-DIM-220 (Dimmable Electronic Constant Voltage Driver | Input 220VAC, Output 48W 12VDC)

Compatible Dimmers:

Lutron's DIVA C-L: Model DVCL-153P & Lutron's MAESTRO C-L: Model MACL-153MH