


FUTURA LIGHTING

Futura RGB Neon Flex LED

Prod. Name: UL-STRIP-NF-RGB

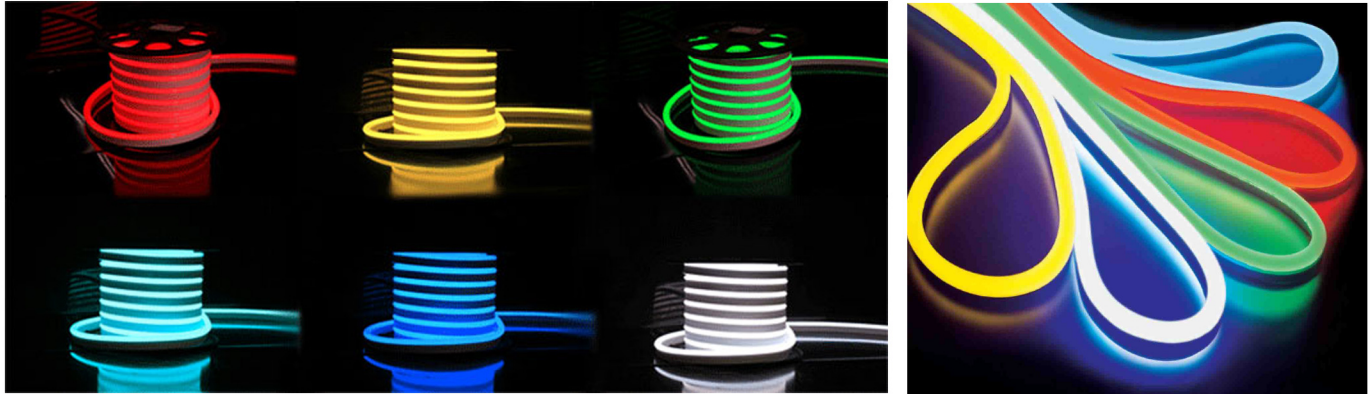

Features:













Item No:	UL-STRIP-NF-RGB
Color:	RGB
Volts:	24V DC
Power:	14.4W/M (4.4W/Ft)
Light source:	SMD 5050
LED QTY:	72 LED/M (22 LED/Ft)
Size (LxW):	1.06 x 0.53 in.
View angle:	270°
IP Grade:	IP65
Cutting intervals:	0.168 M (6.6 in.)
Load length:	20m Max. in one continuous run
PVC Jacket:	Milky white jacketed
Conducting Wire:	Pure copper at 0.75m ² measure
PVC Material:	UV-resistant materials, ultraviolet-proof
PVC stabilizer:	Heat / cool stabilizer ; high / low-temp. resistance
Mini Bend Radius:	R 40mm (sideways bending)
Operating Temp:	0°~ +45°C
Ambient Temp:	-20°~ +45°C
LED lifespan:	50,000 hours+
Warranty:	2 years
Meter/roll:	20m/roll

Compatible LED Drivers:

Non-Dimmable	
FL-2406T Waterproof	(60W, Input 100-240V 50/60Hz, Output 24VDC)
FL-2410W Waterproof	(100W, Input 100-240V 50/60Hz, Output 24VDC)
FL-2420W Waterproof	(200W, Input 100-240V 50/60Hz, Output 24VDC)
LED-350W DC 24V Non-Wat	(350W, Input 110-220V 50/60Hz, Output 24VDC)
LED-600W DC 24V Non-Wat	(600W, Input 90-264V 50/60Hz, Output 24VDC)



Accessories:

	FL-STRIP-NF-PC 2 1/2 ft. Power Cable		FL-STRIP-NF-CONT Controller (No Remote)
	FL-STRIP-NF-EX 2 1/2 ft. Extension Cord		FL-RGB-CONT Non-Waterproof RGB Controller
	FL-STRIP-NF-FP Front Pin to Power Cable		FL-RGB-AMP Non-Waterproof RGB Amplifier
	FL-STRIP-NF-JP Joiner Pin		FL-STRIP-NF-CH 39 in. Aluminum Channel
	FL-STRIP-NF-END End Cap		FL-STRIP-NF-HS Heat Shrink
	FL-STRIP-NF-MS Mounting Screw		FL-STRIP-NF-MC Mounting Clip

